Miele

Fully Integrated 36″ Bottom Mount

KF 1913 Vi / KF 1903 Vi

Fully Integrated 36″ Bottom Mount
KF 1913 Vi / KF 1903 Vi

FOR FLUSH INSTALLATION

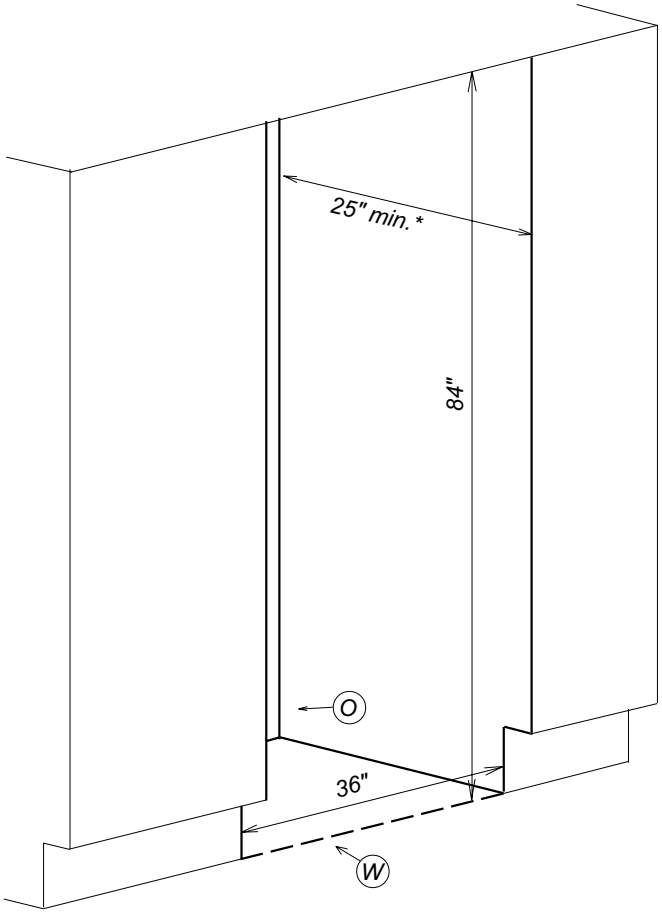

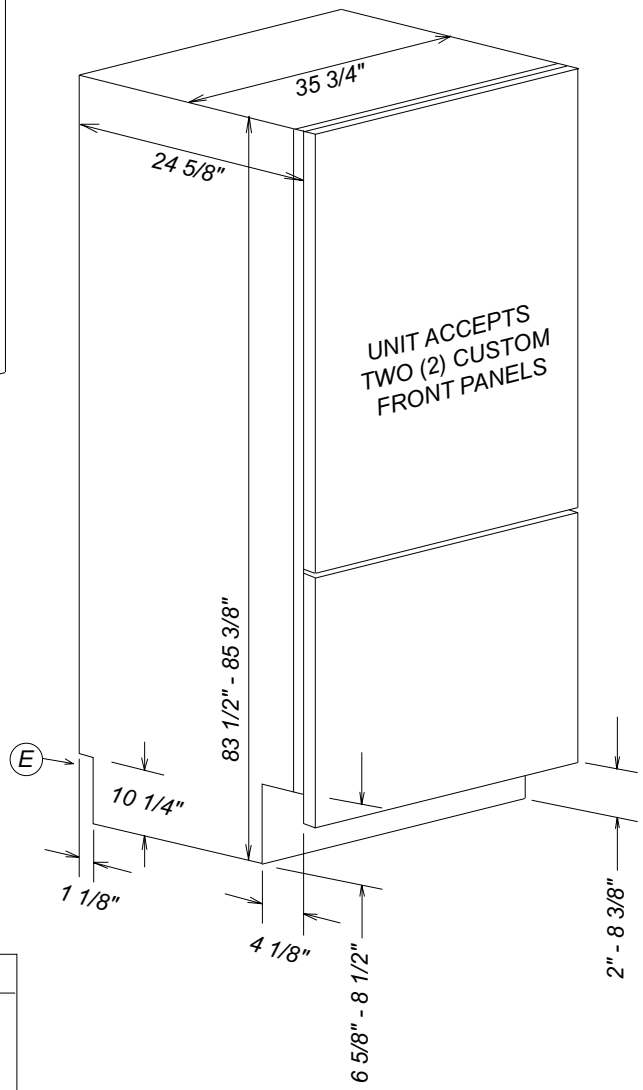

Location Codes
E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear *O - Standard NEMA 5-15 Duplex Outlet - locate less than 9" above finished floor* *W - 1/4" flexible water line - tape to floor*
Notes
• *All Installations must be done in accordance with local codes* • *Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish* • *For Proud Installation - please adjust accordingly*

** Depth assumes a 3/4” panel, please adjust according to custom panel thickness*

LOWER HINGE LOCATION

CUSTOM PANEL INSTALLATIONS

***These units do not come equipped with a front panel**. They are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the panels to align with the surrounding cabinets.*

Panel size is determined in the following manner:

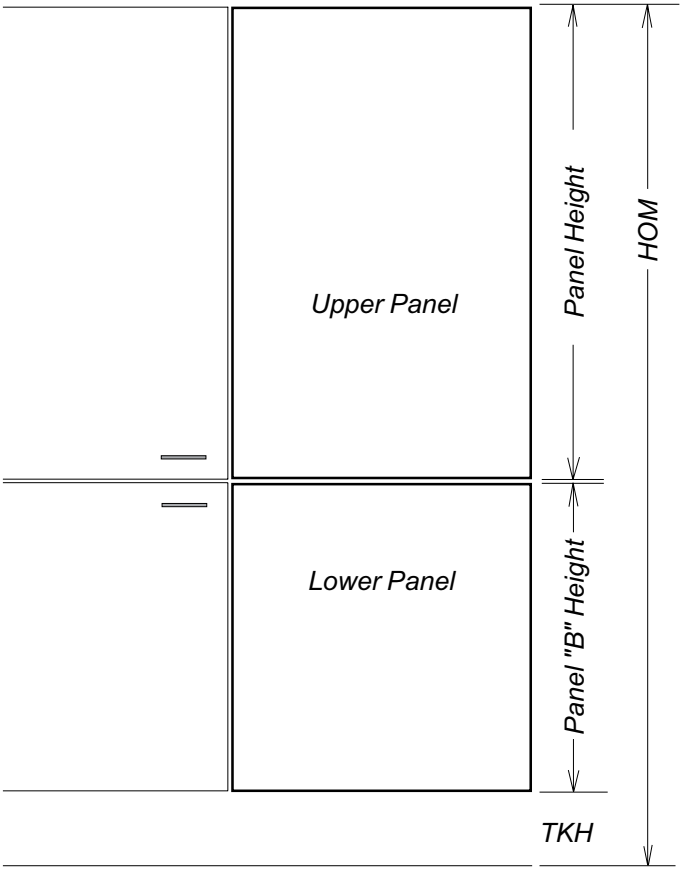

Width: *35 3/4" in all cases*
Thickness: *Minumum 3/4" outside frame*

Standard Upper Panel Height: *53 5/16"*

***Notes**: Finish back side of panels to insure appearance*
*Panel may extend above unit. This is **not** considered in height calculation*

***Upper Maximum panel weight**: 83.8 Pounds*

***Lower Panel Height:** Use the following calculation:*

***Panel Height** = HOM - 53 9/16 - TKH*

HOM** = Total height of machine. Can be adjusted to match adjoining cabinets - **typically 84"
HOM is adjustable between 83 1/2" - 85 3/8"

***TKH** = Toe-kick height (2" - 8 3/8")*

***Lower Maximum panel weight**: 31 Pounds*

Upper Panel Notes

If the adjoining cabinets are taller than the height of machine (HOM) - the upper panel may be extended accordingly. Find the difference between height of the adjoining cabinets and the height of machine (HOM) and add to 53 5/16"

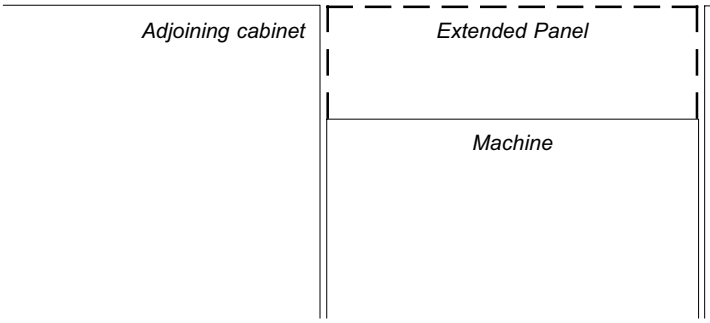

Example:

Ajoining cabinet height:	*87"*
Height of machine:	*84"*
Difference:	*3"*
Extended panel height:	*56 5/16"*

HINGING DETAILS

90° Door

Thickness options

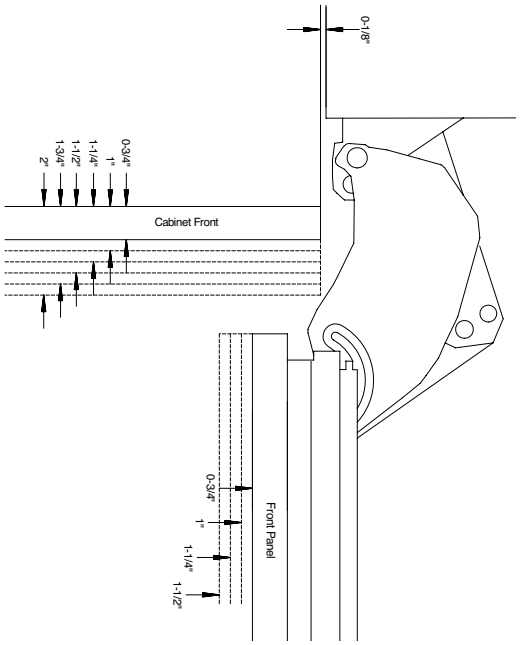

Door Swing

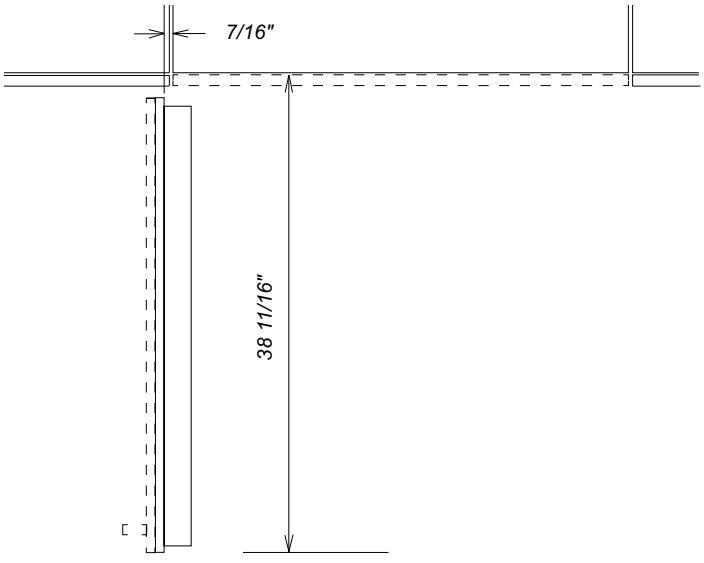

***NOTE**: Additional space needed depending on thickness of front panels and handle used*

115° Door

Thickness options

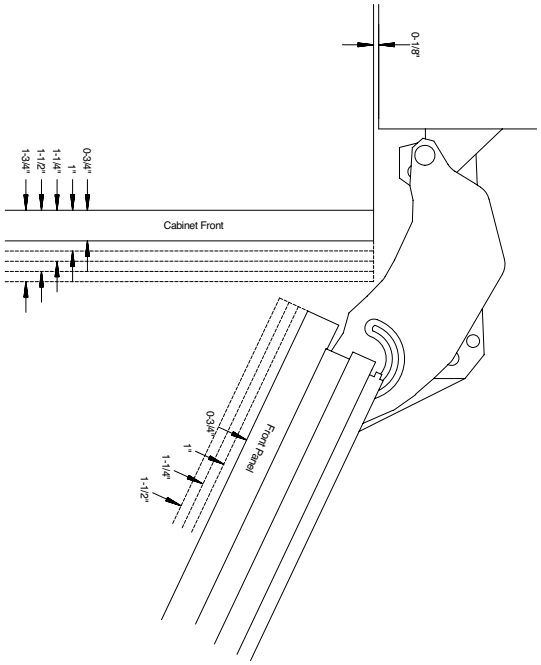

Door Swing

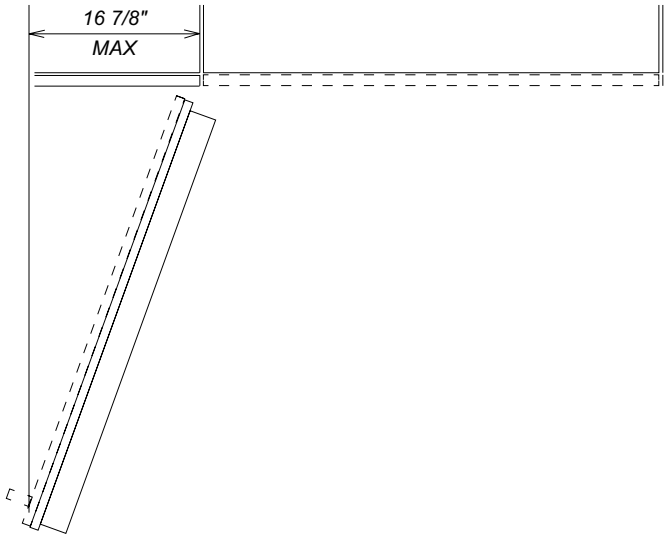

***NOTE**: Additional space needed depending on thickness of front panels and handle used*

HINGING DETAILS

115° Door

Thickness options

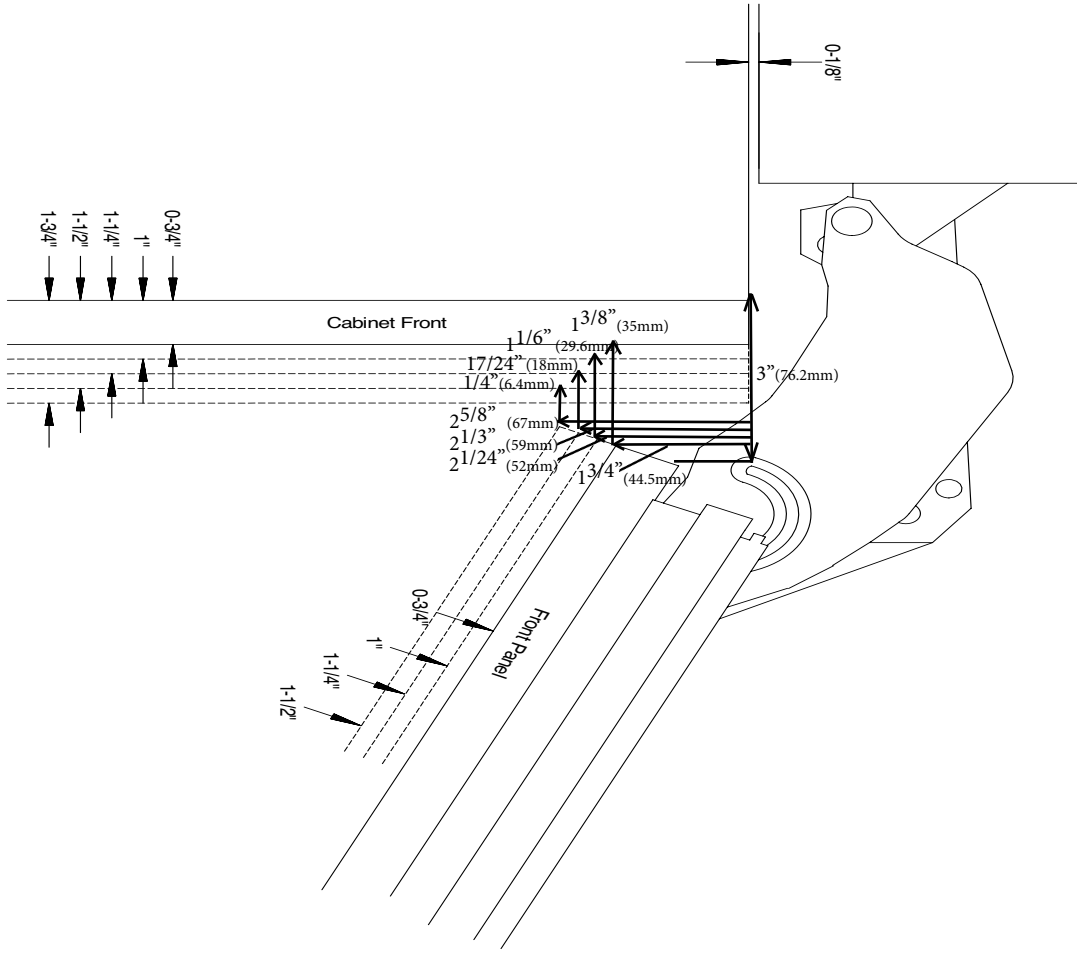

Door Swing

HINGING DETAILS FOR INSTALLATION WITH APPLIANCE/OBJECT ON HINGE SIDE

90° Door

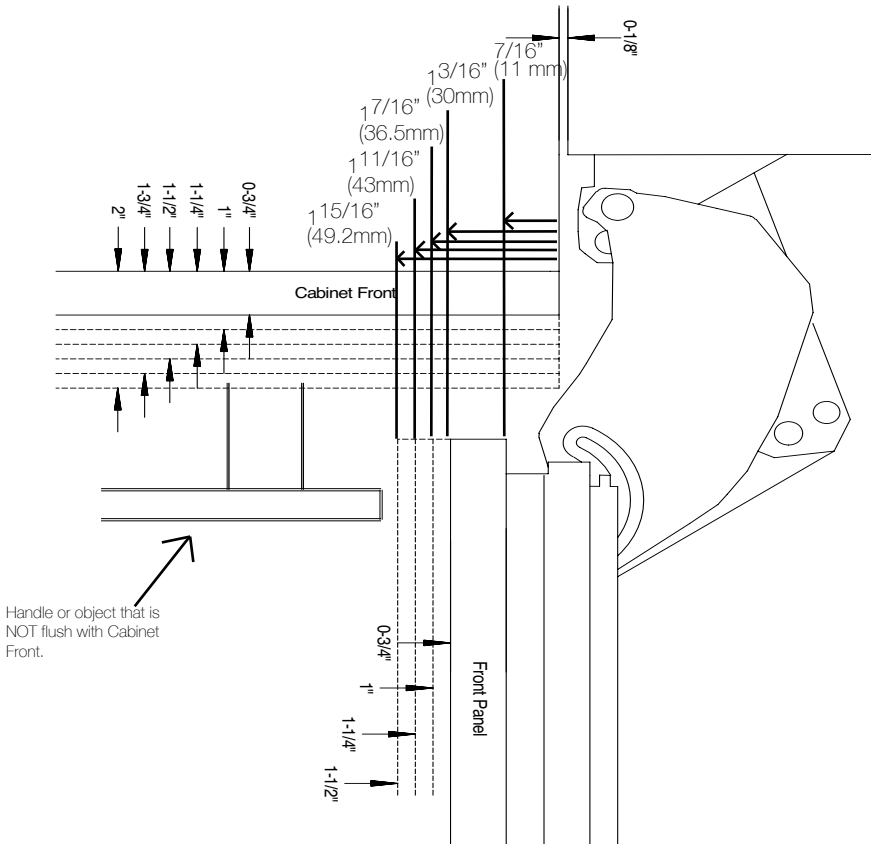

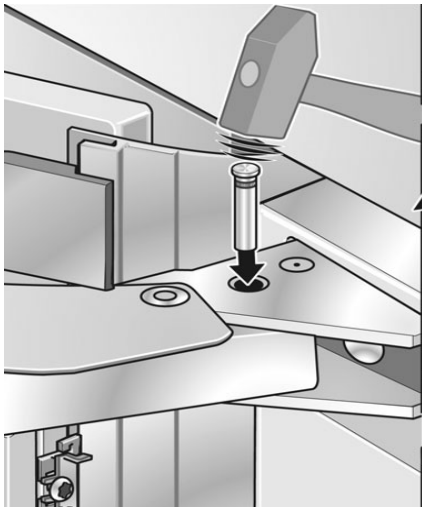

**When installing hing side next to an appliance or object that is within range of the door panel, limit the door opening angle to 90°. This is done by installing the banking pin as illustrated. Insert the banking pin through the holes and drive in with a hammer.